

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
13 May 2004 (13.05.2004)

PCT

(10) International Publication Number  
**WO 2004/040219 A1**

- (51) International Patent Classification<sup>7</sup>: F28D 9/00, F28F 3/02
- (21) International Application Number: PCT/EP2003/012132
- (22) International Filing Date: 31 October 2003 (31.10.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
1021794 31 October 2002 (31.10.2002) NL  
1022794 27 February 2003 (27.02.2003) NL
- (71) Applicant (for all designated States except US): OXY-CELL HOLDING B.V. [NL/NL]; Kaagstraat 17-19, NL-8102 GZ Raalte (NL).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): REINDERS, Johannes, Antonius, Maria [NL/NL]; Oude Warkensweg 1, NL-7231 PE Warnsveld (NL).
- (54) Title: HEAT EXCHANGER AND METHOD OF MANUFACTURE THEREOF
- (74) Agent: AKERS, Noel, J.; Howrey Simon Arnold & White, CityPoint, One Ropemaker Street, London EC2Y 9HS (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report

[Continued on next page]

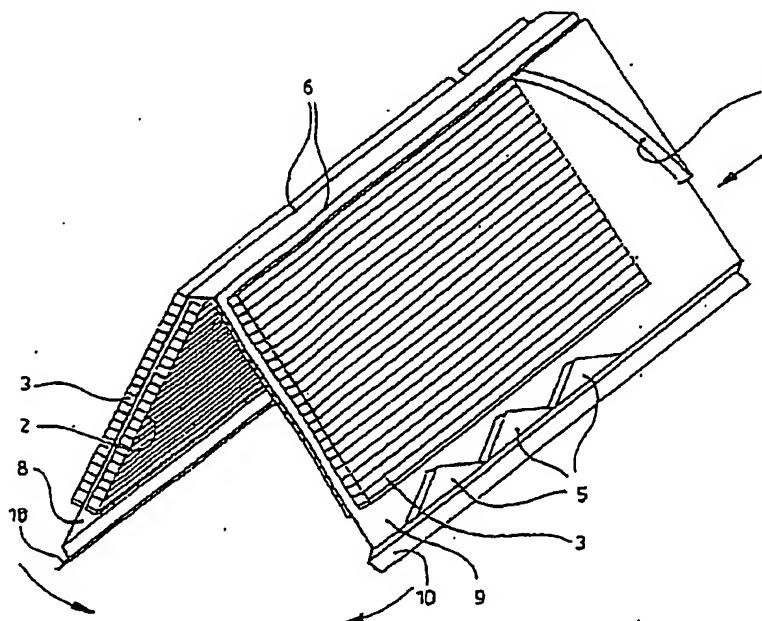

(57) Abstract: Method of manufacturing a heat exchanger from a formable laminate (1, 11, 105) of a metal layer and a heat-seal layer whereby the laminate is sealed under heat and pressure to itself or to another similar laminate to form a flow channel for a heat exchange medium. Preferably the heat exchanger includes a series of fins (3, 106, 107) formed on the laminate (1, 11, 105) to increase heat transfer and may also include a water retaining layer (204).

BEST AVAILABLE COPY

WO 2004/040219 A1

WO 2004/040219 A1



— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.